

# *Soozier*

INaae001V01\_CA

**AA0-063**



**IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY**

**IMPORTANT, A LIRE ATTENTIVEMENT ET A CONSERVER POUR  
CONSULTATION ULTERIEURE**

## **ASSEMBLY INSTRUCTION**

# INSTRUCTION

## Assembling Steps:

1. Put out the model from box and see the red arrows on one side.

2. Open the model as the red arrows directions, so that it is the ready using state.



## Wheel Truing Stand

1. Used for wheel steel rim truing.
2. Fit for wheel size from 16-29" 700C bikes



## Using Instruction:

1. Put the wheel on the stand as picture A, The distance between the two Rotating support rack is 11-15cm.
2. Rotating the support rack as customer using require. After rotating, please firm the screw to ready for using.
3. The final using image as picture C.



A



B



C

# INSTRUCTION

## Étapes d'assemblage :

1. Sortez le modèle de la boîte et remarquez les flèches rouges sur un côté.

2. Ouvrez le modèle en suivant les directions des flèches rouges, afin qu'il soit prêt à l'emploi.



## Support de rotation des roues



1. Produit pour le tournage des jantes en acier exclusivement.  
2. Convient aux roues des vélos de 16 à 29 pouces 700C




## Instruction d'utilisation :

1. Mettez la roue sur le support comme sur l'image A. La distance entre les deux supports rotatifs est de 11-15 cm.
2. Faire tourner le support selon les besoins du client. Après la rotation, fixez la vis pour qu'elle soit prête à l'emploi.
3. La dernière image d'utilisation est comme sur la photo C.



A

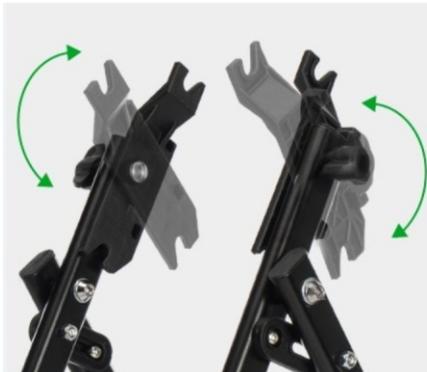

B



C

