

Figure.1

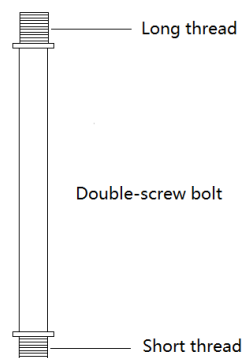


Figure.2

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for 5 x 40-watt maximum G9 standard bulb.
4. The ceiling must have at least the capacity of 5 times the weight of the ceiling light.

Warnings:

1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your ceiling light is fully assembled and installed.

The manufacturer and distributor accepts no liability for incorrect installation.

2. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
3. Deviation from instructions may result in a risk of fire or electric shock.








CARE INSTRUCTIONS:

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable/cord of this ceiling light cannot be replaced: If the cable is damaged, do not use the light.
6. For indoor use only.
7. To avoid the risk of fire, do not exceed the recommended wattage.
8. Keep away from children.

TO ASSEMBLE:

Please check the part list to **BEFORE** assembly, if there is any parts missing please contact our custom service.

Part List:

Part	Quantity	Check ☑ / ☒
Mounting crossbar 	1	
Lamp body 	1	
Double screw bolts 	4	
Crystal strings 	16	
Glass panel 	1	
Acrylic sheet 	1	
Screw and plastic plug (in one bag) 	8	

TO ASSEMBLE:

1. Take out the lamp body and disassembly the mounting crossbar. Locate 4 bolts on the cross ceiling plate according 4 pilot holes on the lamp body by fasten the nuts shown in partial enlarged drawing;
2. Drill 4 holes in the ceiling, insert the plastic plugs and then fix the cross ceiling plate by screws;
3. Uncover the white protective film on the lamp body and fix all the 4 double screw bolts on the lamp body by 4 pilot holes. Insert the long thread end of bolts to the lamp body and fasten by nut as figure 2.
4. **MAKE CONNECTIONS:**(We recommend 2 people for the remainder of installation) Using wire connectors connect the SUPPLY GROUND WIRE to the FIXTURE GROUND WIRE., connect the SUPPLY BROWN WIRE(S) to the FIXTURE BROWN LEAD(S); Connect the SUPPLY BLUE WIRE to the FIXTURE BLUE LEAD(S). Wrap all connections with approved electrical tape;
5. Fix the lamp body on the cross ceiling plate by fasten 4 nuts;
6. Install 5 G9 bulbs;
7. Attach 16 strand of crystal string “A” on the lamp by the metal hook ring shown in partial enlarged drawing.
8. Fix the glass panel and acrylic sheet in turn according the pilot holes and fasten by 4 screw caps in “step 9” shown in figure.

Importer

The address MH STAR UK LTD
Unit 27, Perivale Park,
Horsenden lane South
Perivale, UB6 7RH