

# CHILDREN'S ELECTRONIC TOY CAR OPERATION INSTRUCTIONS

**Please read this manual in detail before using**



- Suitable for age 3+ years.
- Always wear helmet when riding.
- Your new vehicle requires adult assembly.
- Charging the battery can only be operated by adult all times.
- This toy is equipped with a safety isolating transformer. Cable, cord an plug should be examined before using.
- Please keep this manual for future reference.

**Have already implemented ISO9001:2008 authentication**

# Warning: Please read the manual carefully before operation.

- I. THE SPECIFICATION OF THE ELECTRIC CAR
- II. THE LIST OF SPARE PARTS
- III. ASSEMBLING PICTURE
- IV. HOW TO USE
- V. CHARGING THE VEHICLE
- VI. CAUTION FOR SAFETY
- VII. SIMPLE REPAIRS


## I.THE SPECIFICATION OF ELECTRIC CAR

|                |                         |                 |            |
|----------------|-------------------------|-----------------|------------|
| Suitable age:  | 3+ Years                | Battery:        | 6V4 AH     |
| Capacity:      | under 20kgs             | Size of car:    | 66X43X43cm |
| Speed:         | 2.5KM/H                 | Charging times: | 300 TIMES  |
| Charger:Input: | Depend on local voltage | Output:         | DC6V 500mA |
| Charging time: | 8-10HOURS               | Fuse:           | F10A 250V  |

## II. THE LIST OF SPARE PARTS



1. x1 Handle bar parts    2. x 2 Orientation set    3. x 4 Cap Nuts    4. x 2 Bushes



5. x 2 Decoration cover    6. x 4 Washers    7. x2 Front Wheels

# **WARNING**


- PREVENT FIRE AND ELECTRIC SHOCK:
  1. USE ONLY battery and charger provided by manufacturer. Use of the wrong type of battery for charger could cause a fire or explosion.
  2. DO NOT use the battery or charger for any other product. Overheating, fire or explosion could occur.
  3. NEVER modify the electric circuit system. Alterations could cause a shock, fire or explosion.
  4. DO NOT allow any type of liquid on the battery or its components.
  5. Explosive gases are created during charging. DO NOT charge near heat or flammable materials. Charge in a well-ventilated area ONLY.
  6. Charge the battery in a dry area ONLY.
  7. DO NOT open the battery. Battery contains lead acid and other materials that are toxic and corrosive.
  8. DO NOT open the charger. Exposed wiring and circuitry inside case may cause electric shock.
  9. ONLY ADULTS may handle or charge the battery. NEVER allow child to handle or charge the battery. Battery is heavy and contains lead acid(electrolyte).
  10. DO NOT drop the battery. Permanent damage to the battery could occur or cause serious injury.
  11. Before charging the battery, check for wear or damage to the battery, charger and the connectors. DO NOT charge the battery if any damage to parts has occurred. Replace with manufacturer's parts ONLY.
  12. DO NOT allow the battery to drain completely. Recharge the battery after each use or once a month if not used regularly.
  13. DO NOT charge battery upside down.
  14. ALWAYS secure the battery with the bracket. Battery can fall out and injure a child if vehicle tips over.
  15. DO NOT bypass.

### III. ASSEMBLING PICTURE

#### 1.HOW TO ASSEMBLE THE HANDLE BAR?



(1.1)



(1.2)

- (1) PLEASE INSERT THE AXLE OF THE HANDLE BAR INTO THE CONNECTION HOLE, LIKE PICTURE 1.1.
- (2) PUSH THE HANDLE BAR INTO THE CAR BODY LIKE PICTURE 1.2.



(1.3)

- (3). CONNECT ALL WIRING. REFER TO PICTURE 1.3.

CAUTION! Please make sure any loose cables underneath the vehicle are secured with the supplied cable tie to prevent getting caught in the steering.

#### 2.HOW TO FIT THE FRONT WHEEL? |



(2.1)




(2.2)



(2.3)

- (1) PLEASE PUT THE BUSH AND WASHER ON THE FRONT AXLE, THE WASHER INSIDE, LIKE PICTURE 2.1.
- (2) FIT THE WHEEL LIKE PICTURE 2.2.
- (3) FIT THE ORIENTATION SET LIKE PICTURE 2.3.



(2.4)



(2.5)

(4) TAP AXLE CAP ONTO AXLE. PICTURE 2.4.

(5) ADD THE DECORATION COVER AS SHOWN IN PICTURE 2.5

### 3. HOW TO CONNECT THE POWER

(1) OPEN THE SEAT BY UNSCREWING THE NUT LIKE PICTURE 3.1.

(2) PLEASE CONNECT THE WIRE, RED TO RED, BLACK TO BLACK ON THE BATTERY.



(3.1)



(3.2)



Accelerator  
Button

(4.1)

## IV. HOW TO USE

1. PRESS DOWN ON THE RIGHT BUTTON ON THE HANDLE BAR, TO MOVE FORWARD. RELEASE THE BUTTON TO STOP.


3. The car includes glass fuses. The fuse will blow if the rider is over 20kg or if the vehicle is incorrectly used. Change the fuse as shown in the picture 4.2.



(4.2)

## V. Charging The Vehicle

1. The charging input is located at the back of the vehicle. NOTE: Charging the battery should only be done by an adult.

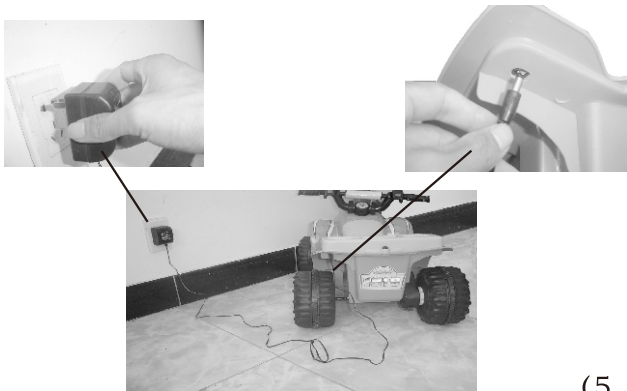

(5.1)

## VI.CAUTION FOR SAFETY:

1. The child must have Adult supervision at all times.
2. Do not ride on the road, footpaths, near pools lakes or rivers.
3. Not suitable for children under 2.
4. Rider should be 20kgs or less.
5. To "stop" you must take your hand off button.
6. Charging should only be done by an adult.
7. An adult must teach the child how to operate the Vehicle.
8. Do not ride on slopes greater than 15 degrees, sand or slippery surfaces
9. Do not use a different size battery.

### Disposal



- Your sealed lead-acid battery must be recycled or disposed of in an environmentally sound manner.
- Do not dispose of your lead-acid battery in a fire. The battery may explode or leak.
- Do not dispose of a lead-acid battery in your regular, household trash. The incineration, land filling or mixing of sealed lead-acid batteries with household trash is prohibited by law.
- Return an exhausted battery to your local approved lead-acid battery recycler, such as a local seller of automotive batteries. Contact your local waste management officials for other information regarding the environmentally sound recycling and disposal of lead-acid batteries.

## VII.SIMPLE REPAIRS

### Charging

- a. Charging time is 8-10 hours. DO NOT charge for more than 20 hours.Note: the charger does get warm.
- b. Make sure to fully charge the first time.
- c. Remove the connector from batter when not in use

### If the vehicle will not start

- a. Inspect the fuse. If damaged, replace with a new one.
- b. Check that the circuit and switch are functioning properly


### If the speed is too slow

- a. Charge the battery

### If the battery will not charge

- a. Check the fuse
- b. Check if the battery charger is functioning properly

### IMPORTANT SUPPLEMENT TO INSTRUCTION MANUAL



**GAP**

After assembling any wheel to the axes, please check the gap between the screw thread and the collapsible (refer to below picture), if the gap is too big, please add two or three washers inside the wheel, But after tightening the nut outside the wheel, please turn the wheel by your finger to check if the wheel can run smoothly, **this is very important**, because if the wheel can run smoothly, it is ok, but if the nut press the wheel and the wheel can't run smoothly, the motor will be broken easily! Then you need to decrease one or two washers to make sure the wheel can run smoothly!

Our products are suitable for  
ASTM F963; GB6675; EN71 and EN62115 standard.

**110421**