

ATTENTION

PLEASE READ THE INSTRUCTION BEFORE USING, IT WILL TELL YOU HOW TO USE AND ASSEMBLE THE TRICYCLE, TO AVOID OF DESTROYING THE PRODUCT AND INJURING YOUR BOBY.

NOTICE

1. THIS TRICYCLE IS FIT FOR CHILDREN OF 1.5-5 YEARS OLD.
2. NEVER LEAVE YOUR CHILD UNATTENDED WHEN IN USE.
3. AVOID USING TRICYCLE ON OR NEAR THRESHOLD, STAIRS OR IRREGULAR PLACES, IT MAY RESULT IN SERIOUS INJURY.
4. DO NOT CARRY CHILD MORE THAN 25KGS, DO NOT LET RUN OVER LOAD.
5. DO NOT USE TRICYCLE ON THE SLOPE DRIVEWAY, ROAD OR STREET.
6. DO NOT USE ALLOW CHILD TO PUSH THE TRICYCLE WHEN THERE IS A BABY USE IT.
7. PLASTIC BAGS MAY BE DANGEROUS. KEEP AWAY FROM THE REACH OF CHILDREN TO AVIOD SUFFOCATION HAZARDS. KEEP AWAY FROM THE FIRE.
8. HIGHLIGHT THE POTENTIAL RISKS OF SHARP POINTS OR EDGES.

WARNING

1. WARNING! ASSEMBLY BY AN ADULT!
2. KEEP AWAY FROM THE STREET AND MOTOR ROAD, KEEP YOUR KIDS IN VIEW.
3. DO NOT PUT THE SMALL PARTS INTO THE MOUTH.
4. DO OVERLOADING, CARRY CAPACITY: 25KGS
5. DO PUT AWAY THE PLASTIC BAGS TO AVOID SUFFOCATION WHEN PLAYING.
6. DO PLAY THIS TRICYCLE IN RIGHT WAY.

MAINTENANCE

1. CLEANNESS: CLEAN THE TRICYCLE BY FLOPPYCLOTH INSTEAD OF AUTO WAX OR WATER AVOIDING DEGENERATING.
2. STORAGE: KEEP AWAY FRAM FIRE, DAMP AND OTHER HIGH TEMPERATURE AREA
3. PLEASE INSPECT SCREW PERIODICALLY TO . ENSURE IT IS NOT LOOSE.



KIDS TRICYCLE

UK



370-026



THIS PICTURE IS FOR REFERENCE ONLY ACCORDING TO REAL GOODS

KIDS TRICYCLE FRAMES



- | | |
|-------------------------|------------------------------|
| 1. Front wheel Assembly | 14. Push bar up-tube |
| 2. Front wheel | 15. Push Handle connection |
| 3. Front fork | 16. Back rest tube |
| 4. Fender | 17. Push bar down-tube |
| 5. Main Frame | 18. Seat |
| 6. Overlay | 19. Push handle fixing part |
| 7. Black sleeve | 20. Rear basket |
| 8. Handlebar Assembly | 21. Rear wheel Frame |
| 9. Guardrail | 22. Rear wheel |
| 10. Back rest | 23. Footrest |
| 11. Canopy Tube | 24. Direction control system |
| 12. Canopy | 25. Front cap |
| 13. Handlebar | |

FUNCTION



- ① Press button as Picture a; Press Footrest down as Picture b; Keep Footrest Flat, as Picture c.




- ② Canopy can be adjusted like fold and open, as Picture a, b.



- ③ Put up-push bar tube in down-push bar tube.
- ④ Press the button open the guardrail.

INSTALLATION

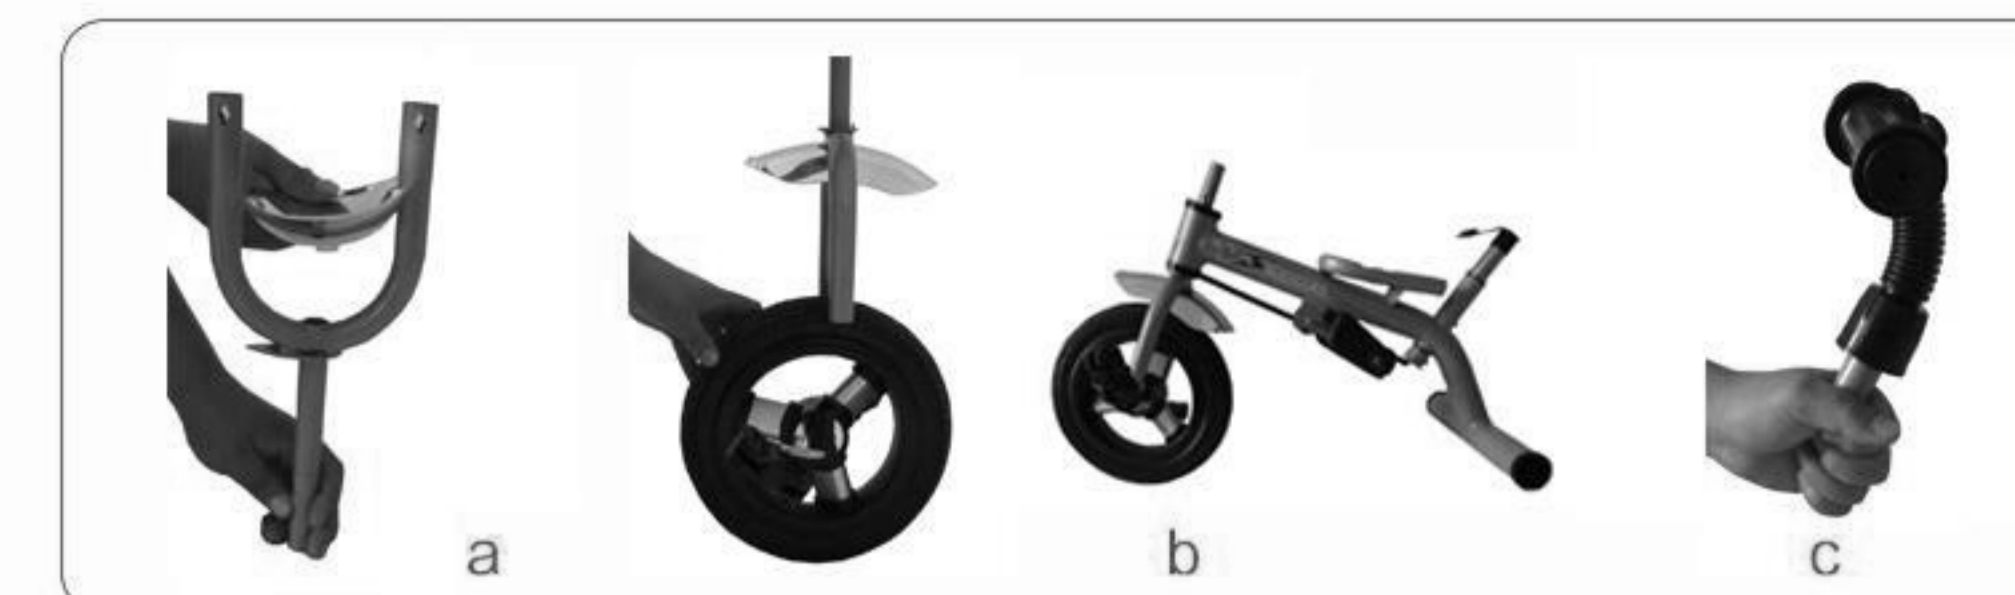

- ① As picture a, put fender into front fork, use screw be fixed.
- ② Put a into b; then put black sleeve and overlay into handlebar like picture c; put C into main frame, fixed by a screw.



- ③ Basket insert Main Frame, rotate basket fixing button.
- ④ As Picture, Guardrail insert Main frame tube, use Bolts&Nuts fixed.
- ⑤ Use Bolts&Nuts fix Seat.



TOOLS

⑥

- ⑥ Canopy tube insert Guardrail tube and fixed.
- ⑦ Push handle insert sleeve and fixed.