



**Max weight: 25 kgs.**



“Mercedes-Benz” ,  and the design of enclosed product are subject to intellectual property protection owned by Daimler AG. They are used by Ningbo Prince Toys Co., Ltd. under license.

**IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY**

**ASSEMBLY INSTRUCTION**

**WARNING:**

1. CHOKING HAZARD—Small parts.  
Only allowed for adults to install, keep children away.
2. To be used under the direct supervision of an adult.
3. Just only allow one child to use.
4. Please use on a flat and clean surface. Never use near steps, sloped driveways, hills roadways, alleys, swimming pool areas, road, on grass or wet surfaces or other bodies of water.
5. Before driving toy car each time, adult should inspect screws of every parts, please tighten the screw cap if any looseness. secure all fasteners before every ride.
6. Always wear shoes and suitable protective equipment. always wear a local standard approved helmet while riding, with the chinstrap securely fastened.
7. Do not ride the product at dusk, at night or at times of limited visibility.
8. Always comply with local laws and regulations.
















**MAINTENANCE & CARE**

- A. Keep all instructions and parts relating to this product for future reference.
- B. Regularly check for damage and that all screws are securely tightened.
- C. Check that the seat is securely fastened.
- D. Lubricate the chain as often as required.
- E. Regularly check tyre pressures.

**Battery Handling:**


- 1-Battery must be handled by adults only.
- 2-Always remove exhausted batteries.
- 3-Use AA size batteries only.
- 4-Alkaline batteries are recommended.
- 5-Always remove batteries when the unit is not going to be used for an extended period of time.
- 6-When replacing new batteries, ensure all batteries are replaced.
- 7-Do not mix old and new batteries.
- 8-Do not mix Alkaline, Standard(Carbon-Zinc), or Rechargeable(Nickel-Cadmium)batteries.
- 9-Do not dispose of batteries in fire, batteries may explode or leak.
- 10- Non-rechargeable batteries are not to be recharged
- 11- Rechargeable batteries are to be removed from the toy before being charged
- 12- Rechargeable batteries are only to be charged under adult supervision
- 13- Batteries are to be inserted with the correct polarity
- 14- The supply terminals are not to be short-circuited

# COMPONENTS LIST

1.Body x1 	2.Steering wheel x1 	3.Backrest x1 
4.Safety bar x2 	5.Safety bar fixed part x1 	6.Thumb latch x2 
7.Push bar x1 	8.Connect tube x1 	9.Canopy x1 
10.Canopy stick x1 	11.Cup holder x1 	12.J-shaped stick x1 
13.M5X28 BOLT x4 (1 replacement piece) 	14.M5 NUT x4 (1 replacement piece) 	15.Screw 3pcs (1 replacement piece) 


## INSTRUCTIONS

**Step 1**




Insert the J-shaped stick into the front of the body, make sure the right position as picture show

**Step 2**



Loosen the bolt and nut in the steering wheel first, then insert the J-shaped stick into the safety-bar fixed part and steering wheel, tight with the bolt and the nut.

**Step 3**




Place the spare tire in the rear of the car body, tighte two screws with a screwdriver.

**Step 4**



Assemble the backrest into the rear of the body.

**Step 5**




Connect the push bar and connect tube with two bolts and nuts as a whole push bar, then take out the snap ring in the end of the tube for standby.

**Step 6**




Insert whole push bar into the hole of the backrest, then turn the body over, insert the snap ring and tight as picture show.


## INSTRUCTIONS

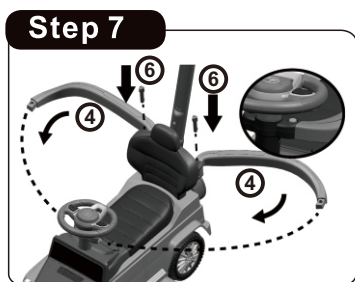

Assemble the safety bar into the backrest by the thumb latch, then insert the safety bar into the hole of safety bar fixed part.




Assemble the canopy tube and canopy with a bolt and nut.



Insert the canopy tube into the hole of the backrest, make sure it is completely firmed.

### BATTERY CHANGE



Loosen the screw with a screwdriver ,  
Put 2 AA size batteries in the battery house.  
Then tight the screw with a screwdriver.

US



001-877-644-9366  
customerservice@aosom.com

CA



001-855-537-6088  
customerservice@aosom.ca

UK



0044-800-240-4004  
enquiries@mhstar.co.uk

DE



0049-(0)40-88307530  
service@aosom.de

FR



0033-1-84166106  
contact@aosom.fr

ES



0034-931294512  
atencioncliente@aosom.es

IT



0039-0249471447  
clienti@aosom.it