



INfk006\_US

**342-066V02**

## **Kids Trampoline**



IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

# **UESR'S MANUAL**

# Precaution

- \* Maximum load: 50kg.
- \* Only for ages 1-10 years. Children must be under adult supervision.
- \* Only one child can use this product at a time.
- \* Ensure children jump near the centre of the trampoline.
- \* Before using, please take off glasses, necklaces, watches and other valuable accessories to avoid damages.
- \* Do not put anything in your pocket or on the trampoline when using.
- \* Use the trampoline on a flat and dry surface.
- \* Keep jumping pads and spring pads dry.
- \* Please exercise in a properly lit place.
- \* Do not jump on trampolines outside or in high places.
- \* Do not do somersaults - this could cause serious injury, and in some cases, death.
- \* Do not use this product as a springboard.
- \* Clean with a damp cloth. Do not use corrosive solvent cleaners.
- \* Do not use this product if you have any of the following conditions or illnesses:
  - Breathing problems.
  - Spinal cord injury, cerebral sclerosis or acute swelling of joints.
  - Osteoporosis, gout, unhealed fractures or surgically implanted orthopaedic stents.
  - High blood pressure, heart disease or use of a pacemaker.
  - Use high doses of anticoagulants.

## **Notice:**

- \* There are some small parts in this product. Children must be supervised, ensuring they do not accidentally swallow small parts.
- \* Some parts have sharp edges and must be assembled by an adult. Read all safety instructions before assembling.

# Parts List

If any parts are missing, deformed or damaged when you receive your package, please contact customer service with your order number and we will ship the replacement parts to you as soon as possible.

**1** x6



**2** x3



**3** x1



**4** x30



**5** x1




**6** x1



**7** x6



**8** x18



**9** x1



**10** x6



# Assembly method

## Step 1: Assemble the trampoline bed

Step 1: Assemble the trampoline bed

Prepare six frame tubes. Connect six frame tubes one by one to form a ring, as shown.


When connecting the last two frame tubes, press firmly. When the loops are formed, the joints may not coincide completely - do not worry. During later use, all frame tubes will eventually coincide more.

Note: When assembling, pay attention to sharp edges to avoid scratches.



## Step 2: Install the leg tube

Prepare three U-shaped tubes (picture 2). Insert three U-shaped leg tubes into the frame. Align each hole and snap in.

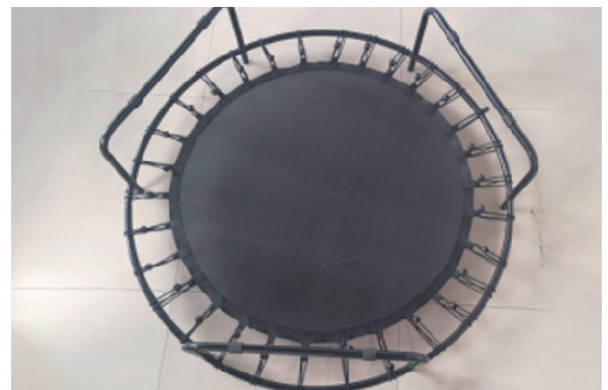



# Assembly method

## Step 3: Assemble the trampoline mat

Prepare the mat (picture 3) and thirty elastic jump ropes (picture 4) – thread the elastic rope through the holes on the edge of the mat. Then thread the bungee cord through the bottom frame tube and secure the cord with the bungee ball. The spring ball is fixed under the frame tube. When installing the jumpers, arrange them diagonally.



## Step 4; Install cover cloth and support tube

Prepare the edge cloth (picture 5) to turn over the bed, then spread the edge cloth to the tube position corresponding to the bed. Match with the hole and tie the fixing rope, as shown in the picture.



# Assembly method

## Step 5: Install the pole and plastic sheath

Before installation, prepare 6 support tubes (parts in Figure 10). After confirming the upper and lower ends of the pole, place the end with the hole corresponding to the position of the hole on the bed, install the pole, and fix it with screws. Press the plastic sheath into the hole in the head of the pole and fix it with screws. As shown below.



## Step 6: Install the Safety Net

For this, prepare a safety net (Parts Figure 9)

Insert the safety net (with the plastic buckle facing down) horizontally from the top of the support rod. After inserting, use the plastic buckle on the safety net to fix the bottom elastic rope. So our trampoline is installed.

Refer to the image below.





# Assembly method

If with grab bars, find the following accessories:


Type O screw\*4



Wrench\*1



Nut washer\*4



Handrail L rods\*2



Handrail crossbar\*1



Handrail vertical rod\*2



Fix the O-type screw into the hole of the leg. Put the upright rod into the position of the three-shaped screw and plastic according to the angle shown in the figure. Tighten the upright rod on one side, then align the L-shaped upright rod with the upright rod and buckle it. Install the other side of the pole. After installation, do not fix the O-type screws on the feet first, buckle the marbles on the cross bar into the holes of the L-type poles on both sides, then fasten the screws on the feet.

